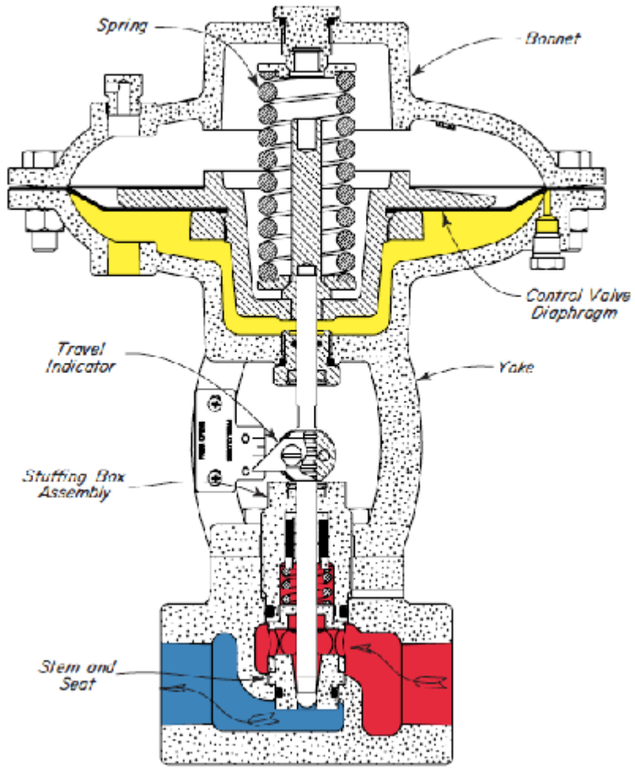

Control Valve Diaphragm Assembly
Control Valve Diaphragm Pressure
Upstream Pressure
Downstream Pressure

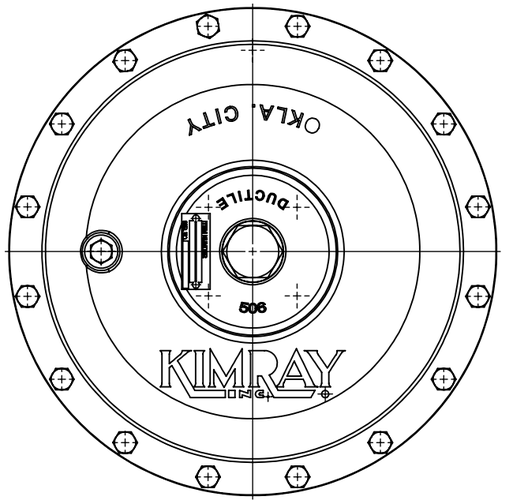

FEATURES & SPECIFICATIONS:

- APPLICATIONS: FOR DISCHARGE OF LIQUID OR GAS FROM WELLS. FOR BACK PRESSURE OR PRESSURE REDUCING APPLICATIONS WITH PRESSURE PILOTS.
- STEM TRAVEL: 2" HPCV - 3/4"
- ACTUATOR WORKING PRESSURE: 30 PSIG
- WORKING PRESSURE: 2" HPCV 4000 PSIG
- TEMPERATURE RANGE: -20˚ TO 500˚ F
- LINE SIZE: 2"
- TRIM TYPE: NOMINAL
- TRIM STYLE: 1"

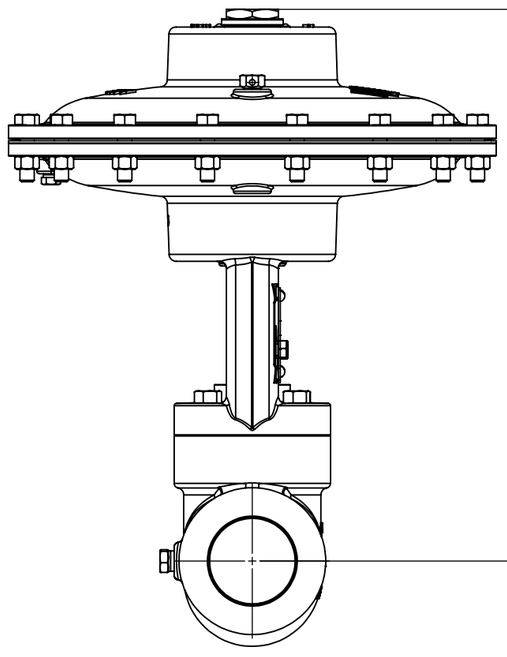

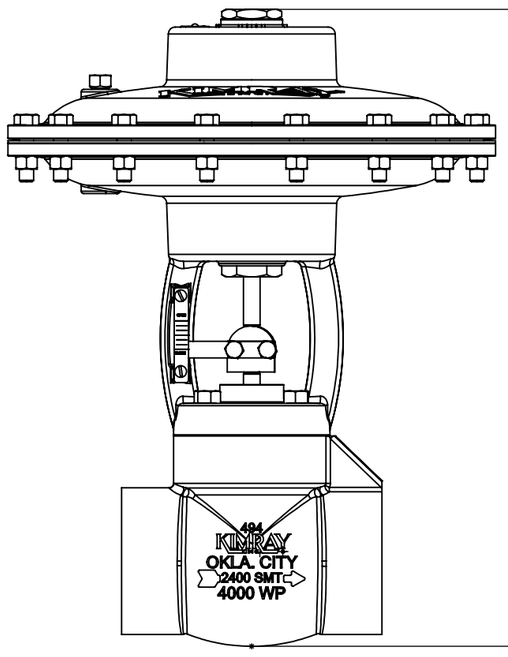

CUSTOMER SPECIFICATION DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES [MM]	DRAWN	dab	6/10/15
METRIC DIMENSIONS ARE FOR REF.	CHECKED	-	6/10/15
TOLERANCES:			
.X = ± .03 [.8]			
.XX = ± .01 [.25]			
.XXX = ± .003 [.08]			
FRACTIONAL: ± 1/16"			
ANGULAR: ± 1 DEGREE			

MATERIAL

FINISH
63Ô OR BETTER

DO NOT SCALE DRAWING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WELLMASTER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WELLMASTER IS PROHIBITED.

Well Master Corporation
400 Corporate Circle
Suite L-M
Golden, Colorado 80401

TITLE:
VALVE, 2 INCH, 2400 MAX. WORKING PRESSURE

SIZE	DWG. NO.	REV
B	VAL2401	00

SCALE: 1:8 | WEIGHT: | SHEET 1 OF 1