



WELL MASTER
Produce more. Spend less.

MODULAR LUBRICATOR


WELD FREE, DROP-IN LUBRICATOR SYSTEM FOR MAXIMUM CUSTOMIZATION AND EXPEDITED WELL HEAD INSTALLATION

APPLICATIONS

The Modlube was designed for operations in a wide temperature range and corrosive applications and was created specifically to reduce the time and cost associated with higher pressure oil & gas well head installation thus lowering total installation expenses.

FEATURES AND BENEFITS

- Available in multiple outlet configurations to fit most API well head designs
- Assemble to order designs specific to customer needs
- Body constructed of 4140-L80 alloy steel with powder coating for longevity and corrosion protection
- Meets API 6A wellhead spacing ensuring proper alignment and mechanical integrity improving operational efficiency and safety
- Heavy Duty, e-nickel plated catcher for extended life and corrosion resistance
- Additional material/wall thickness for added strength and safety
- Self greasing catcher design with duplicate O-rings to prevent leaks
- Heavy Duty Bowen Nut with Handles for ease of use
- Multiple 1/2" NPT threaded ports for:
 - Hydrostatic testing while on well head
 - Chemical injection
- Compatible with multiple trip rods and anvils

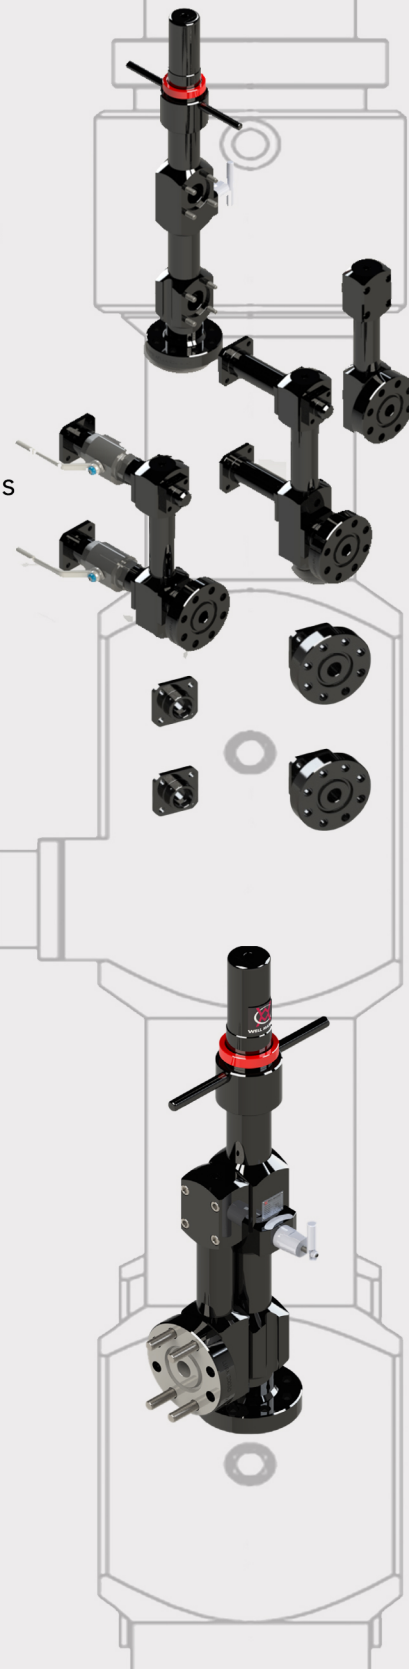




WELL MASTER
Produce more. Spend less.

MODULAR LUBRICATOR

PART NUMBER CONFIGURATOR

		Part Number	
		Example	
		LUBM	2000
		P	T
		P	F
		V	V
		F	F
1	PRODUCT	Modular Lubricator	
2	SIZE	2000	2-3/8"
		2500	2-7/8"
3	PRESSURE/ TEMPERATURE RATING	5,000 PSI/-50°F to 180°F	L
		5,000 PSI/-20°F to 180°F	P
4	MODEL	Flanged Tee/Cross 2000 (7.31" x 22.12") 2500 (7.44" x 22.69")	T
		Studded Tee/Cross 2000 (4.50" x 19.31") 2500 (4.50" x 19.81")	C
		Standard Model (No Merged Flange Assy)	D
		Internal Bypass (7.31")	G
		Internal Bypass (4.50")	J
5	PORTED	Ported/Adapters	P
		No Ports	Blank
6	INLET	Flange 5K	F
		Flange 10K	X
7	FIRST OUTLET	Valve	V
		Spool	S
		Flange 5K	F
		Threaded	T
		Special	Z
8	SECOND OUTLET	Valve	V
		Spool	S
		Flange 5K	F
		Threaded	T
		Special	Z
9	MERGED FLANGE OUTLET	Flange 5K	F
		Flange 10K	X
		No Merged Assembly	Blank

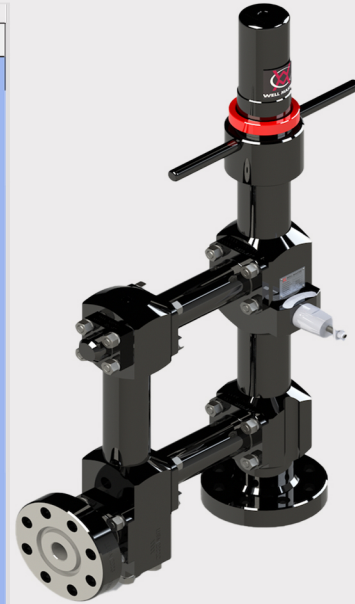

LUBM2000TPFSSF

Contact Well Master today to find out how we can help optimize your oil and gas well production.

Call 303.980.0254 | Email info@wellmaster.com | Visit www.wellmaster.com
16201 Table Mountain Parkway, Suite 100 | Golden, CO 80403 | Fax 303.980.0355

©2023 Well Master Corporation, All rights reserved.