



WELL MASTER
Produce more. Spend less.

SHEARMASTER™


FLOATING DOWNHOLE STOP AND "SCALE BUSTER"

APPLICATIONS

- Excellent **paraffin and scale control**
- Used in **high liquid producing wells** in place of bottom hole spring assembly

FEATURES AND BENEFITS

- No setting required
- Square bottom as as a No-Go
- Easily retrieved with a fishing plunger
- **Cleaning action** works as the tool cycles in lower tubing
- Commonly used in combination with a Viper Plunger as a "scale buster" to remove scale above the downhole spring - **OFTEN ELIMINATES ACID JOBS**
- Hardened steel plated with electroless nickel for **extended life**
- Reserve flutes **eliminate spin** while providing an effective shear mixing chamber
- Large open area of flutes and hollow core **minimize travel** during flow cycle

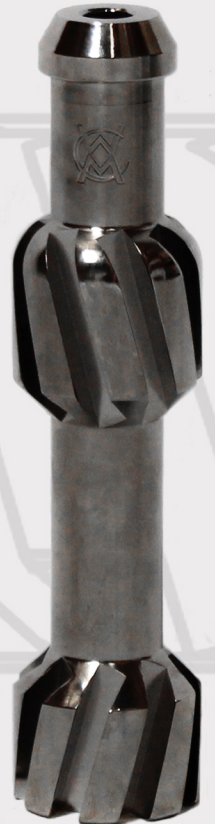

DHS2000SM

TECHNICAL SPECIFICATIONS

Part No.	Outside Tubing Dia. (in.)	Nominal Inside Tubing Dia. (in.)	Nominal Tubing Weight (lbs./ft.)	Plunger Length (in.)	Nominal Plunger Dia. (in.)	Plunger Weight (lbs.)
DHS2000SM	2 3/8	1.995	4.7	8.10	1.90	2.6
DHS2500SM	2 7/8	2.441	6.5	8.89	2.35	3.7
Materials of Construction:	Constructed of hardened and electroless nickel plated steel for sweet gas service					

Contact Well Master today to find out how we can help optimize your oil and gas well production.

Call 303.980.0254 | Email info@wellmaster.com | Visit www.wellmaster.com
16201 Table Mountain Parkway, Suite 100 | Golden, CO 80403 | Fax 303.980.0355

©2023 Well Master Corporation, All rights reserved.