



WELL MASTER

Produce more. Spend less.

Talon^{RF}

EQUIPPED WITH INNOVATIVE TECHNOLOGIES TO CREATE MORE TRIPS PER DAY AND FALLS AGAINST MORE FLOW TO INCREASE PRODUCTION EARLIER IN THE LIFE OF THE WELL

APPLICATIONS

Used in wells that are in the initial stage of liquid loading which produce high gas and liquid volumes

FEATURES AND BENEFITS


- The **Patented TALON Aerodynamic Vents** allow the sleeve to fall against more flow and achieve more trips/day to produce more oil and gas
- **Reliability** through the Dual Surface Seal on the ball and sleeve interface
- **Sealing Technology** is specifically designed for fast fall while maintaining sealing properties
- **Longevity** is achieved by proprietary advanced metallurgy and surface treatment
- **Available** in 6", 9", and 12" sleeve lengths in steel, Stainless Steel, Titanium and ACTII extended life versions
- **Multiple** ball materials available
- **TALON^{TS} (Turbulent Seal)** version is available for applications that require premium seal



PBS2000BN9




Sleeve Customization Matrix

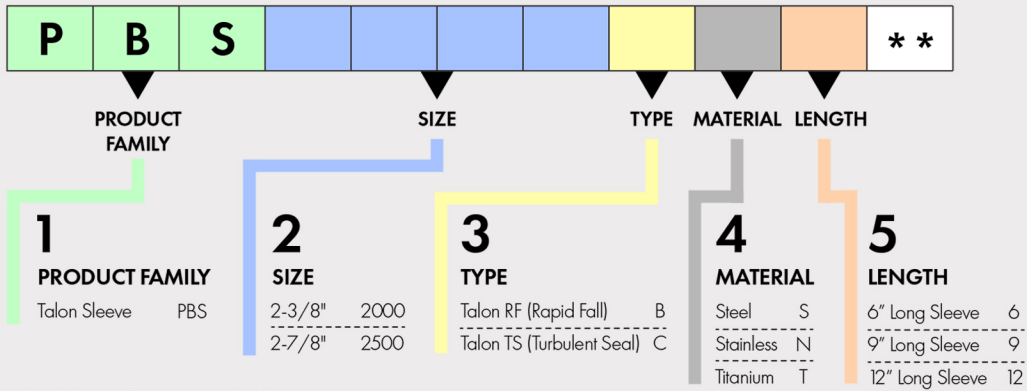


* Additional sizes available upon request
** Add "ii" to the end of the part code of the steel (S) material for ACTII advanced coating technology treatment (i.e. PBS2000BSii)

Ball Customization Matrix

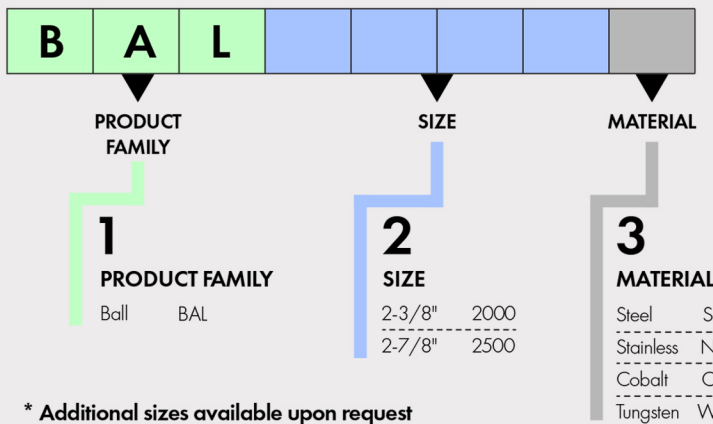

BALL WEIGHTS	
Part No.	Ounces
BAL2000S	6.2
BAL2000N	6.2
BAL2000C	6.9
BAL2000W	12.3
BAL2500S	11.4
BAL2500N	11.2
BAL2500C	11.7
BAL2500W	22.7

* Additional sizes available upon request

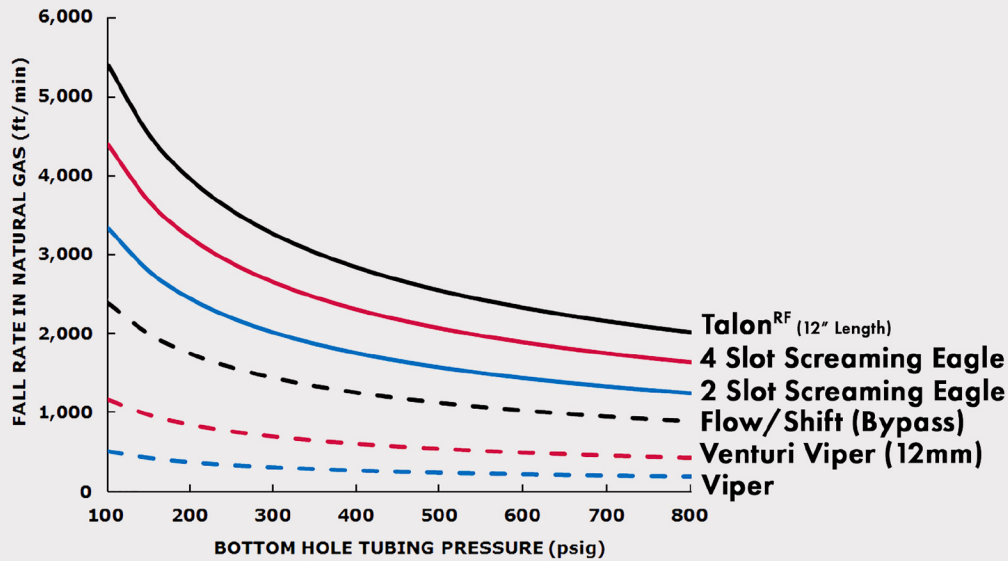

Contact Well Master today to find out how we can help optimize your oil and gas well production.

Call 303.980.0254 | Email info@wellmaster.com | Visit www.wellmaster.com
 16201 Table Mountain Parkway, Suite 100 | Golden, CO 80403 | Fax 303.980.0355